




## JOINTS

PRE-FILLED WITH GEL  
for free connections

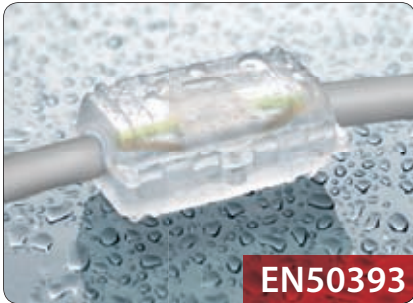

EN50393

**Electrical performance:** CEI EN 50393 • CEI 20-33  
(with testing under water head and water  
between the cable cores)  
Class 2 in accordance with CEI 64-8.

Gel: US

Operating temperature





Installation temperature:   
-40°C / +50°C

## LV


# Gel Cover Line

Accessory pre-filled with gel for straight connections for the protection, safety and covering of electrical connections using strip connectors or alternatives

- For 3 x 1 to 6 mm<sup>2</sup> cables or 3 insulated wires
- For civil and industrial connections
- To put household systems in order
- Also for underwater use
- Non-toxic and with no shelf life
- Ready to use

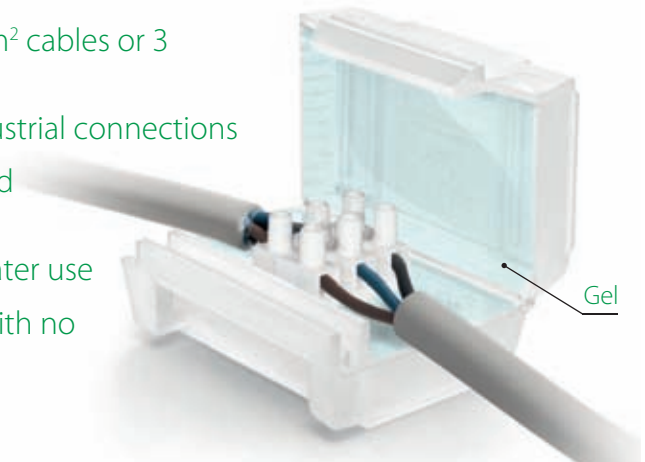


## OHM & BAR



Product	Housed connectors type	Pieces per package	Package type	Dimensions A x B x C (mm)
OHM				
OHMp11	2 from 4 mm <sup>2</sup>	11	box	61 x 35 x 28
BAR				
BARp9	3 from 4 mm <sup>2</sup> / 6 mm <sup>2</sup>	9	box	63 x 41 x 28



## Mammut Gel Cover



Product	Housed connectors type	Pieces per package	Package type	Dimensions A x B x C (mm)
Gel Cover 4				
Mammut Gel Cover	2 from 4 mm <sup>2</sup>	6	box	61 x 35 x 28
Gel Cover 6				
Mammut Gel Cover 6	3 from 4 mm <sup>2</sup> / 6 mm <sup>2</sup>	8	box	63 x 41 x 28

No flame propagation. CEI 20-35 • IEC 60332-1 • HD405-1 (as applicable) **Casing mix:** UL 94-V2